

MOSABOWLINGIN KESÄKISA



Oil Pattern Distance: 39 Feet **Reverse Brush Drop:** 39 Feet **Oil Per Board:** 40 uL
Forward Oil Total: 10.6 mL **Reverse Oil Total:** 10.36 mL **Volume Oil Total:** 20.96 mL
Forward Boards Crossed: 265 Boards **Reverse Boards Crossed:** 259 Boards **Total Boards Crossed:** 524 Boards


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	3L	3R	2	14	70	0.0	1.9	1.9	2800
2	4L	4R	2	14	66	1.9	5.8	3.9	2640
3	6L	6R	2	14	58	5.8	9.7	3.9	2320
4	8L	8R	2	14	50	9.7	13.6	3.9	2000
5	10L	10R	1	14	21	13.6	15.5	1.9	840
6	2L	2R	0	26	0	15.5	36.0	20.5	0
7	2L	2R	0	30	0	36.0	39.0	3.0	0

Conditioner:
Type In or Select One

TransferType:
Type In or Select One

Forward
Reverse
Combined
Buff

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	39.0	32.0	-7.0	0
2	10L	10R	2	22	42	32.0	25.8	-6.2	1680
3	7L	7R	1	22	27	25.8	22.7	-3.1	1080
4	6L	6R	3	18	87	22.7	15.1	-7.6	3480
5	5L	5R	1	18	31	15.1	12.6	-2.5	1240
6	3L	3R	1	18	35	12.6	10.1	-2.5	1400
7	2L	2R	1	14	37	10.1	8.2	-1.9	1480
8	2L	2R	0	14	0	8.2	0.0	-8.2	0

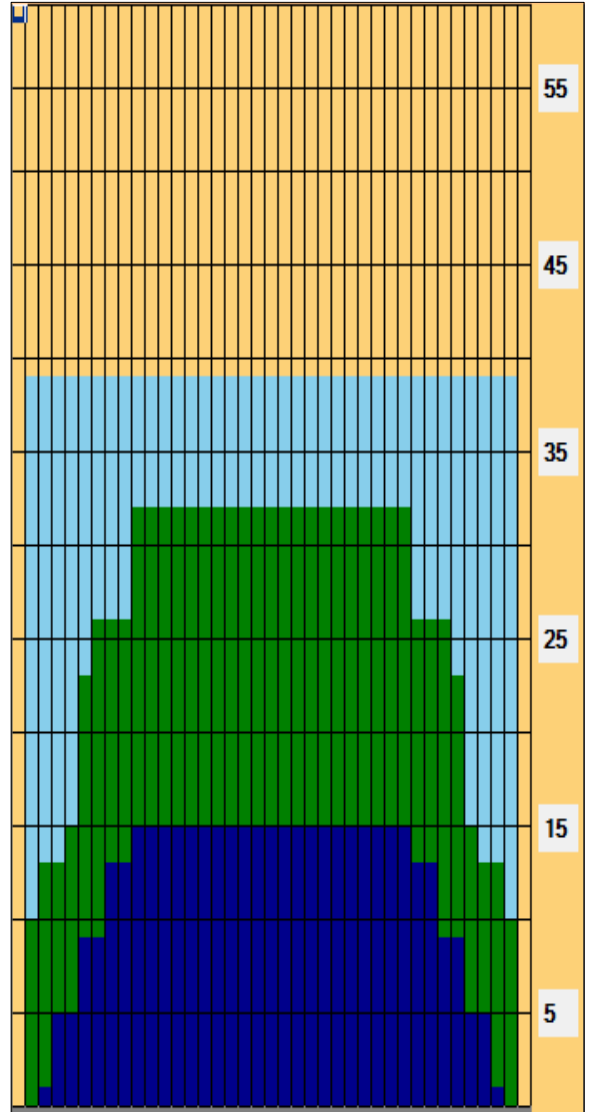

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	2.14	1.07	1	1	1.07	2.14

