

TOPI HILPISEN MEMORIAL




Oil Pattern Distance: 40 Feet **Reverse Brush Drop:** 32 Feet **Oil Per Board:** 50 uL
Forward Oil Total: 11.45 mL **Reverse Oil Total:** 7.9 mL **Volume Oil Total:** 19.35 mL
Forward Boards Crossed: 229 Boards **Reverse Boards Crossed:** 158 Boards **Total Boards Crossed:** 387 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	3L	3R	1	10	35	0.0	0.0	0.0	1750
2	6L	6R	1	14	29	0.0	1.9	1.9	1450
3	7L	7R	1	14	27	1.9	3.8	1.9	1350
4	8L	8R	3	18	75	3.8	11.4	7.6	3750
5	10L	10R	3	18	63	11.4	19.0	7.6	3150
6	2L	2R	0	22	0	19.0	24.0	5.0	0
7	2L	2R	0	22	0	24.0	35.0	11.0	0
8	2L	2R	0	30	0	35.0	40.0	5.0	0

Conditioner: Type In or Select One
 TransferType: Type In or Select One

Forward
 Reverse
 Combined
 Buff

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	40.0	29.0	-11.0	0
2	10L	10R	2	26	42	29.0	21.7	-7.3	2100
3	8L	8R	1	26	25	21.7	18.1	-3.6	1250
4	7L	7R	1	22	27	18.1	15.0	-3.1	1350
5	6L	6R	1	18	29	15.0	12.5	-2.5	1450
6	3L	3R	1	18	35	12.5	10.0	-2.5	1750
7	2L	2R	0	14	0	10.0	0.0	-10.0	0

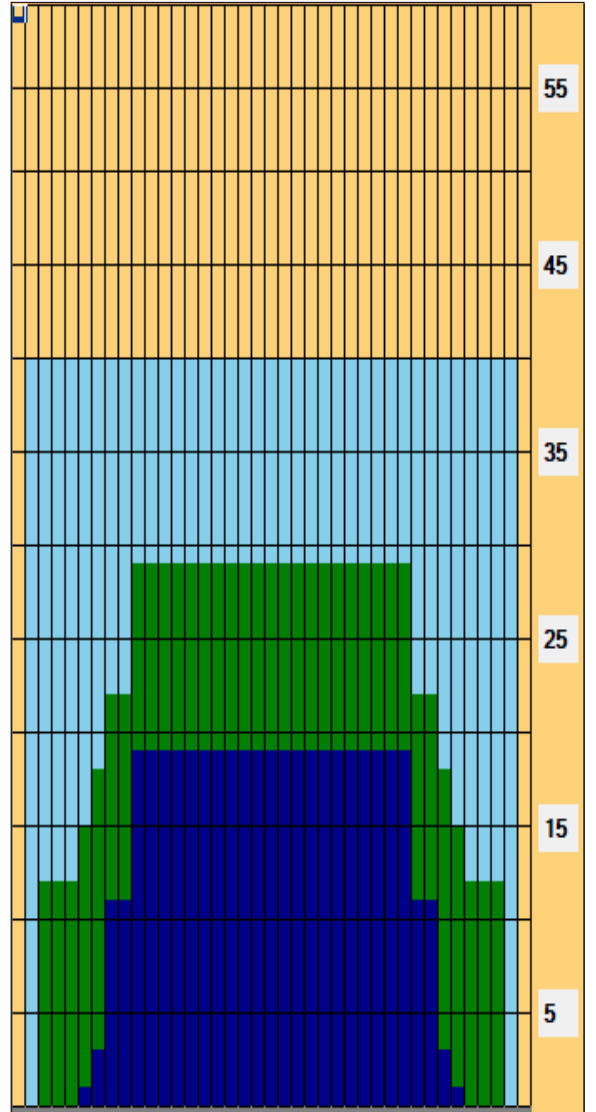

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	4.69	1.15	1	1	1.15	4.69

