

STRIKE BACK



Oil Pattern Distance: 41 Feet **Reverse Brush Drop:** 35 Feet **Oil Per Board:** 40 uL
Forward Oil Total: 12.04 mL **Reverse Oil Total:** 8.16 mL **Volume Oil Total:** 20.2 mL
Forward Boards Crossed: 301 Boards **Reverse Boards Crossed:** 204 Boards **Total Boards Crossed:** 505 Boards


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	3L	3R	2	18	70	0.0	2.5	2.5	2800
2	7L	7R	1	18	27	2.5	5.0	2.5	1080
3	8L	8R	2	18	50	5.0	10.1	5.1	2000
4	10L	10R	3	18	63	10.1	17.7	7.6	2520
5	11L	11R	3	18	57	17.7	25.3	7.6	2280
6	12L	12R	2	22	34	25.3	31.5	6.2	1360
7	2L	2R	0	22	0	31.5	41.0	9.5	0

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	26	0	41.0	34.0	-7.0	0
2	13L	13R	2	22	30	34.0	27.8	-6.2	1200
3	11L	11R	2	18	38	27.8	22.7	-5.1	1520
4	10L	10R	3	18	63	22.7	15.1	-7.6	2520
5	9L	9R	2	18	46	15.1	10.0	-5.1	1840
6	7L	7R	1	14	27	10.0	8.1	-1.9	1080
7	2L	2R	0	14	0	8.1	0.0	-8.1	0

Conditioner:
 Type In or Select
 One

 TransferType:
 Type In or Select
 One

- Forward
- Reverse
- Combined
- Buff

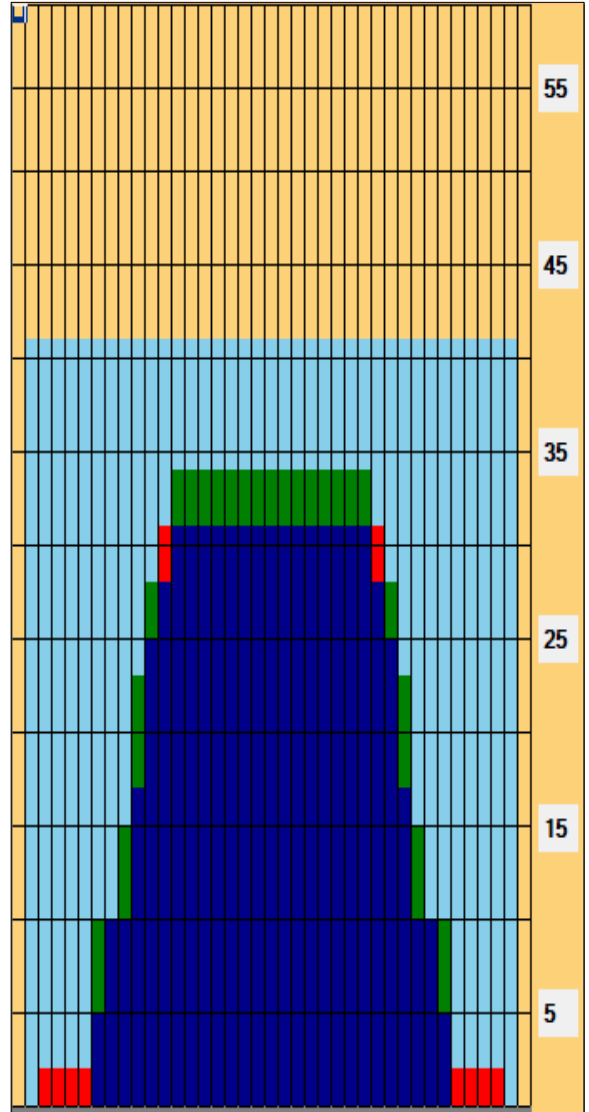

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	9.58	1.69	1	1	1.69	9.58

